




TEMPORARY HORIZONTAL LIFE LINE

SPECIFICATION FOR 915130



SUITABLE FOR: Use as a temporary horizontal life line as a two person system.

- 30mm wide polyester webbing.
- Total Length: 20M.
- Adjustable Length: 5-20M.
- Conforms to EN 795:1996, class B
- Tested & certified for use by two users simultaneously.

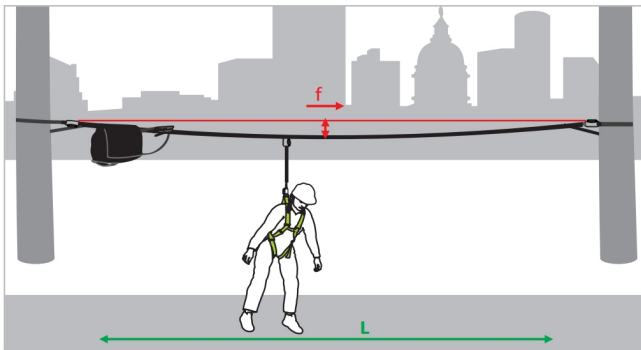

30mm 5-20M

REF.	915130
CE 0598	PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013
	x2
MAT.	 30 mm PES
R (kN) (f) / MBS (kN)	19 kN / 23 kN
MAT.  	
LG. (L) / MIN. → MAX.	2.0 m → 20.0 m / 0.3 m → 2.43 m
	3.43 KG



Number of users



Material of connector / tensioner

R (kN) / MBS (kN)

Static strength / Minimum Breaking Strength

LG. / MIN. MAX.

Min. → Max. length / Min. → Max. deflection

NSW Head Office

43 Frank Street
 Wetherill Park, NSW 2164
 02 9757 2277

WA Office

42 Mulgool Road
 Malaga, WA 6090
 08 9248 6674

QLD Office

7 Durbell Street
 Acacia Ridge, QLD 4110
 07 3272 0777

VIC Office

47 Technology Drive
 Sunshine West, VIC 3020
 03 9314 5525